# **PNP General-Purpose Amplifier**

## PZTA56, MMBTA56

#### **General Description**

This device is designed for general-purpose amplifier applications at collector currents to 300 mA. Sourced from process 73.

#### **Features**

• These are Pb-Free Devices

#### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted) (Note 1, Note 2)

Symbol	Parameter	Value	Unit
V <sub>CES</sub>	Collector-Emitter Voltage	-80	٧
V <sub>CBO</sub>	Collector-Base Voltage	-80	٧
V <sub>EBO</sub>	Emitter-Base Voltage	-4.0	٧
I <sub>C</sub>	Collector Current – Continuous	-500	mA
T <sub>J</sub> , T <sub>STG</sub>	J, T <sub>STG</sub> Operating and Storage Junction Temperature Range		ç

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. These ratings are based on a maximum junction temperature of 150°C.
- 2. These are steady-state limits. ON Semiconductor should be consulted on applications involving pulsed or low-duty-cycle operations.



#### ON Semiconductor®

www.onsemi.com



SOT-223-4 CASE 318H

FS

Ζ

Х

A56



**FSZXYYKK** A56

= On Semiconductor Logo

= Assembly Plant Code

= Single Digit Numeric Year Code Last Digit of the Calendar Year

YY = Two Digit Weekly Numeric Code ΚK

= Two Alphanumeric Character Lot Code

= Device Code




SOT-23-3 CASE 318BM

2G

&E

&G



**MARKING DIAGRAM** 

= ON Semiconductor Logo = Specific Device Code = Designated Space = Pb-Free Package

### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>	
PZTA56	SOT-223-4	4000 Tape & Reel	
MMBTA56	SO-23-3	3000 Tape & Reel	

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

## PZTA56, MMBTA56

## THERMAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

		Max		
Symbol	Parameter	PZTA56 (Note 3)	MMBTA56 (Note 4)	Unit
P <sub>D</sub>	Total Device Dissipation	1000	350	mW
	Derate Above 25°C	8.0	2.8	mW/°C
$R_{ hetaJA}$	Thermal Resistance, Junction-to-Ambient	125	357	°C/W

<sup>3.</sup> PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

## **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Max	Unit
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage (Note 5)	$I_C = -1.0 \text{ mA}, I_B = 0$	-80		V
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage	$I_C = -100 \mu\text{A},  I_E = 0$	-60		V
V <sub>(BR)EBO</sub>	Emitter-Base Breakdown Voltage	$I_E = -100 \mu\text{A},  I_C = 0$	-4.0		V
I <sub>CES</sub>	Collector Cut-Off Current	V <sub>CE</sub> = -60 V, I <sub>B</sub> = 0		-0.1	μΑ
I <sub>CBO</sub>	Collector Cut-Off Current	$V_{CB} = -80 \text{ V}, I_{E} = 0$		-0.1	μΑ
h <sub>FE</sub>	DC Current Gain	$I_C = -10 \text{ mA}, V_{CE} = -1.0 \text{ V}$	100		
		$I_C = -100 \text{ mA}, V_{CE} = -1.0 \text{ V}$	100		
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	$I_C = -100 \text{ mA}, I_B = -10 \text{ mA}$		-0.25	V
V <sub>BE</sub> (on)	Base-Emitter On Voltage	$I_C = -100 \text{ mA}, V_{CE} = -1.0 \text{ V}$		-1.2	V
f <sub>T</sub>	Current Gain – Bandwidth Product	$I_{C} = -100 \text{ mA}, V_{CE} = -1.0 \text{ V},$ f = 100 MHz	50		MHz

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

<sup>4.</sup> Device mounted on FR-4 PCB 36 mm x 18 mm x 1.5 mm; mounting pad for the collector lead minimum 6cm<sup>2</sup>.

<sup>5.</sup> Pulse test: pulse width  $\leq$  300  $\mu s,$  duty cycle  $\leq$  2.0%.

## PZTA56, MMBTA56

#### TYPICAL PERFORMANCE CHARACTERISTICS

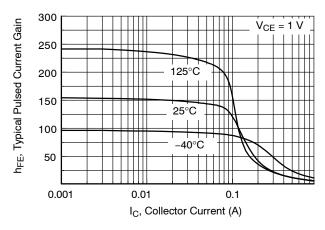


Figure 1. Typical Pulsed Current Gain vs. Collector Current

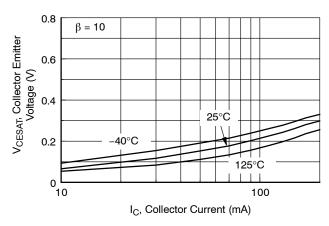


Figure 2. Collector – Emitter Saturation Voltage vs. Collector Current

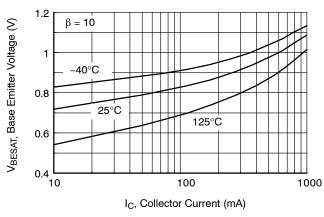


Figure 3. Base-Emitter Saturation Voltage vs. Collector Current

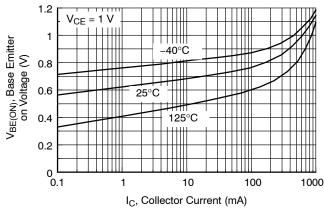


Figure 4. Base-Emitter On Voltage vs. Collector Current

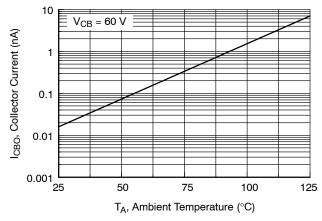


Figure 5. Collector Cut-Off Current vs. Ambient Temperature

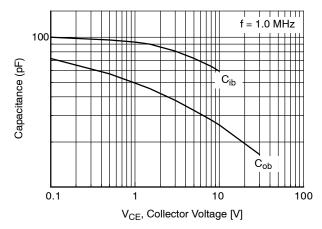


Figure 6. Input and Output Capacitance vs. Reverse Voltage

## PZTA56, MMBTA56

## TYPICAL CHARACTERISTICS (continued)

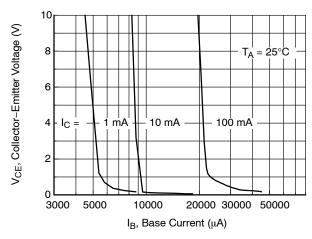


Figure 7. Collector Saturation Region

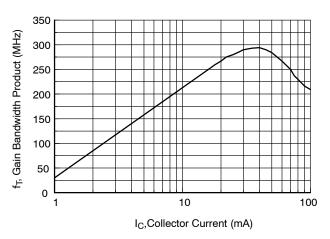


Figure 8. Gain Bandwidth Product vs. Collector Current

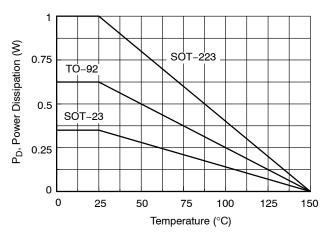


Figure 9. Maximum Safe Operating Area

3






#### SOT-23 CASE 318BM ISSUE A

**DATE 01 SEP 2021** 



- A) REFERENCE JEDEC REGISTRATION TO-236, VARIATION AB, ISSUE H.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE INCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M 2009.

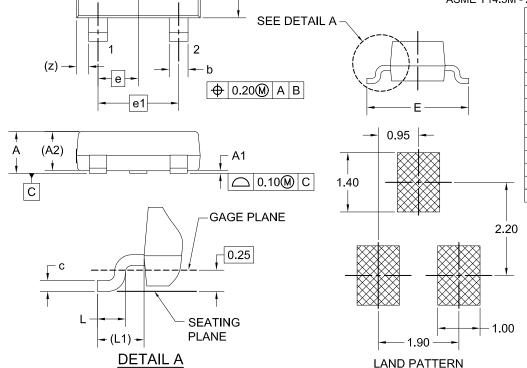

Α

В

E1

MILLIMETERS NOM. MIN. MAX. Α 1.20 Α1 0.00 0.05 0.10 A2 0.93 REF b 0.37 0 44 0.60 0.08 0.23 С 0.15 D 2.72 2.92 3.12 Ε 2.10 2.40 2.70 E1 1.15 1.30 1.50 0.95 BSC е 1.90 BSC e1 0.20 L ---L1 0.55 REF z 0.29 REF

# GENERIC MARKING DIAGRAM\*



\*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

RECOMMENDATION

XXX = Specific Device Code
M = Date Code

■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON13784G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-23		PAGE 1 OF 1	

onsemi and ONSemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

SCALE 2:1



A

В


**DATE 13 MAY 2020** 


#### NOTES


- DIMENSIONING AND TOLERANCING PER ASME
- DIMENSIDNING AND TOLERANCING PER ASME
  Y14.5M, 2009.
  CONTROLLING DIMENSION: MILLIMETERS
  DIMENSIONS D & E1 ARE DETERMINED AT DATUM
  H. DIMENSIONS DO NOT INCLUDE MOLD FLASH,
  PROTRUSIONS DR GATE BURRS. SHALL NOT
  EXCEED 0.23mm PER SIDE.
  LEAD DIMENSIONS & AND &1 DO NOT INCLUDE
  DAMBAR PROTRUSION. ALLOWABLE DAMBBAR
  PROTRUSION IS 0.08mm PER SIDE.
  DATUMS A AND B ARE DETERMINED AT DATUM H.
  A1 IS DEFINED AS THE VERTICAL DISTANCE
  FROM THE SEATING PLANE TO THE LOWEST
  POINT OF THE PACKAGE BODY.
  POSITIONAL TOLERANCE APPLIES TO DIMENSIONS
  & AND &1.

- b AND b1.

	MILLIMETERS			
DIM	MIN.	N□M.	MAX.	
Α			1.80	
A1	0.02	0.06	0.11	
b	0.60	0.74	0.88	
b1	2.90	3.00	3.10	
С	0.24		0.35	
D	6.30	6.50	6.70	
E	6.70	7.00	7.30	
E1	3.30	3.50	3.70	
е	2.30 BSC			
L	0.25			
į.	0°		10°	

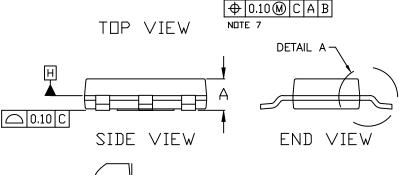





**MARKING DIAGRAM\*** 

AYW

XXXXX.


= Assembly Location = Year

= Work Week **W** 

XXXXX = Specific Device Code = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

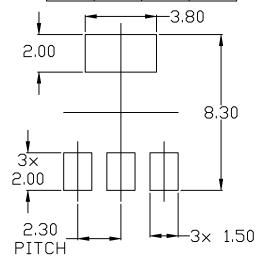

### RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the IIN Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASH70634A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-223		PAGE 1 OF 1	

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales